

NAC-111/111C

Analog Ceiling Speaker




MAIN FUNCTIONS

1.NAC-111/111C is a full frequency ceiling speaker with 5 inch coaxial treble speaker unit to make sound clear . Besides it with mounting tab to make installation easier.

2.NAC-111/111C ceiling speaker can connect with 100V amplifier directly .User can realize different power rate options via this speaker.

Circuit Diagram

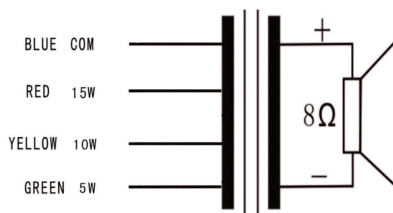

Wiring:


When wiring , user should connect amplifier COM to blue wire. And amplifier 100V input should connect as follows

For example:

When using 15W rated power, 100V input should connect red wire;

When using 10W rated power, 100V input should connect yellow wire;



When using 5W rated power, 100V input should connect green wire;



SPECIFICATION


NAC-111/111C		
Electric Parameters	Speaker unit	5 inch coaxial treble speaker
	Max power rate	25W
	Rated Power(PHC)	15W
	Frequency(1kHz,1meter)	89dB±3 dB
	Valid Frequency range(-10dB)	80-15kHz
	Rated Voltage	100V
	Input port	Connecting bridge
	Color of input port	Blue, Red , Yellow, Green
Product Information	Product Size	Φ203X 90mm
	Hole size	Φ170mm
	Installation method	Ceiling installation
Raw Material	Shell	White ABS
	Net cover material	Iron with white coating
Work Information	Working temperature	-25°C~+55°C
	Working humidity	-40°C~+70°C
	Relative humidity	< 95%

DIMENSION

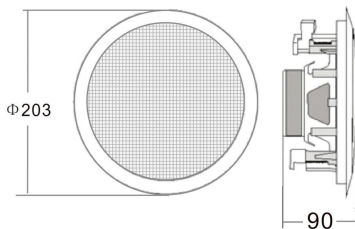

APPLICATION

The analog ceiling speaker NAC-111/111C can be connected with constant voltage amplifier for receiving broadcast or announcement from server software or IP paging mic .

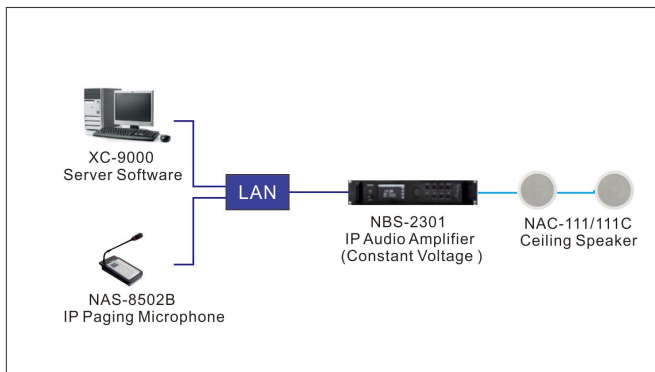

INSTALLATION

