

NAC-2305

30Watt 100Volt Wall Mount Speaker




MAIN FUNCTIONS

1.NAC-2305 is Indoor and outdoor waterproof speaker, sound clear and beautiful, for human voice, music has the restoration of the real amplification characteristics, standard U-shaped bracket, IPX5 waterproof design, can be mounted from multiple angles or linear combination of installation, suitable for indoor and outdoor environment.

2.NAC-2305 has a power selection switch, divided into 8 Ω , 30W, 20W, 10W, 5W, 2.5W five gear. 8 Ω for fixed resistance speakers.

Circuit Diagram

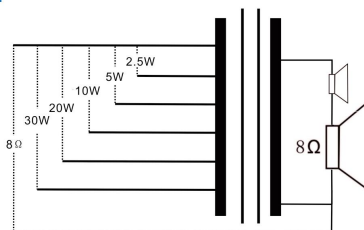


Wiring:

When wiring, the power amplifier output COM shall be connected with the black cable, and the power amplifier output 100V shall be connected with white cable.

1.Using rated power 30W: the power selector switch selects 30W gear

2.Using rated power 20W: the power selector switch selects 20W gear

...



SPECIFICATION

POWER PARAMETERS

Rated Power:30W

Max Power:40W

Power Selection:30W/20W/10W/5W/2.5W/8 Ω

Input Voltage:100V

SPEAKER PARAMETERS

Sensitivity:90 $\pm$ 3dB

Frequency Response:70Hz-20kHz

MECHANICAL & ENVIRONMENTAL PROPERTIES

Mounting Method:Wall Mount

Installation Environment:Dry Indoor or outdoor Locations

Speaker Unit:1 $\times$ 5" PP Cone Woofer;1 $\times$ 1" PP Cone Tweeter

Product Color:White

Shell Material:ABS

Working Temperature:-25 $^{\circ}$ C~+55 $^{\circ}$ C

Product Dimensions (mm):295*196*157

Product Weight:3.6kg

Warranty:2 Years


ACCESSORIES

1 $\times$ Installation Manual

1 $\times$ Certification


2 $\times$ Fixing bolts

1 $\times$ Bracket



APPLICATION

The 30Watt 100Volt Wall Mount Speaker NAC-2305 can be connected with constant voltage amplifier for receiving broadcast or announcement from Audio Management Software XC-9000 or IP Paging Console.

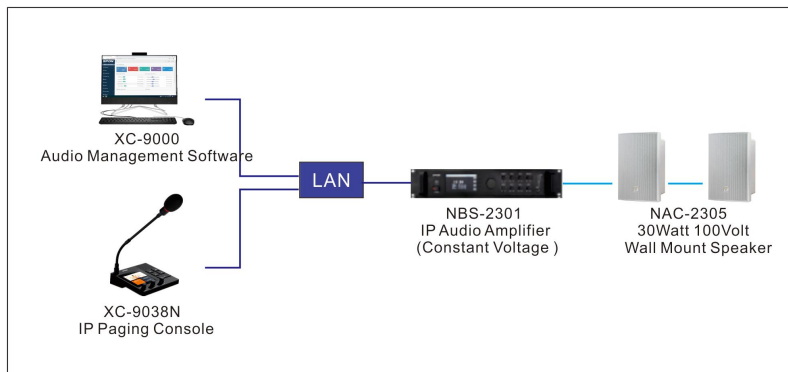

DIMENSIONAL DRAWING

