


XC-9520A


IP Wall Mount Remote PA Controller



SPON IP Wall Mount PA Controller XC-9520A adopts standard 86 type box structure design, capacitive touch screen interface, suitable for hotel, conference room, lecture hall and other public areas.

MAIN FUNCTIONS

- 1.Compact structure & delicate appearance, adopts 86 type box installation.
- 2.Built-in 4-inch capacitive touch screen with 480*480 resolution.
- 3.With the function of remote task broadcast control and task volume adjustment.
- 4.Support free AOD Mp3 files from the media center of SPON Management software XC-9000.
- 5.Support to obtain the online terminal of the server XC-9000 and remotely adjust the volume of the terminal.
- 6.Support to obtain the AOD tasks on server XC-9000 and the tasks can be triggered by manually.
- 7.Equipped with standard RJ45 interface, accessible to the system wherever Ethernet is available, supporting cross-segment and cross-router.



SPECIFICATION

Power Parameters

Power Supply:AC100~240V,50/60Hz

Network Parameters

Network I/F:10BASE-T/100BASE-TX RJ45

Network Protocol:TCP/IP、UDP、ARP、ICMP、IGMP

Configuration Method:Web Interface or On device

Mechanical&Environment Properties

Display Screen:4-inch capacitive touch color screen

Resolution:480*480

Mounting Method:86 type box

Installation Environment:Dry Indoor Locations Only

Operating Temperature:0℃~+40℃

Operating Humidity:5%~90% RH non-condensing

Housing Material:Plastic

Color:Black

Product Dimensions:86x86x37.5mm

Product Weight:0.21kg


Product Warranty:2 Years Limited

Accessories

1×Quick Installation Guide


1×Certificate of quality and Warranty Card

1×Terminal(3.81-2P)




INTERFACE

[Front]

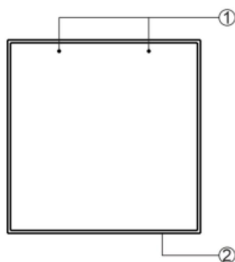


- ① Built-in Microphone
- ② Built-in Speaker


[Back]



- ① RS485 Port:Reserved
- ② RJ45 Network Port
- ③ L2:Live wire Output
- ④ L1:Live wire Output
- ⑤ L:Live wire Input
- ⑥ N:Neutral wire Input





CONNECTION DIAGRAM

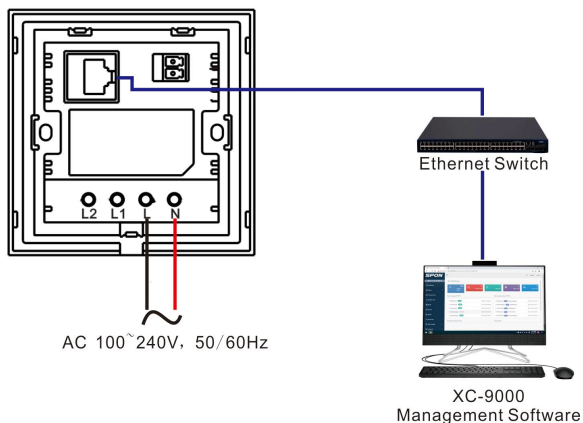



APPLICATION

Application 1

IP Wall Mount PA Controller XC-9520A support to obtain the tasks set on software XC-9000 and manually playback the tasks on the XC-9520A .During the playback , user can adjust the volume in realtime . Also it can remotely AOD mp3 files which stores on media center of software XC-9000.

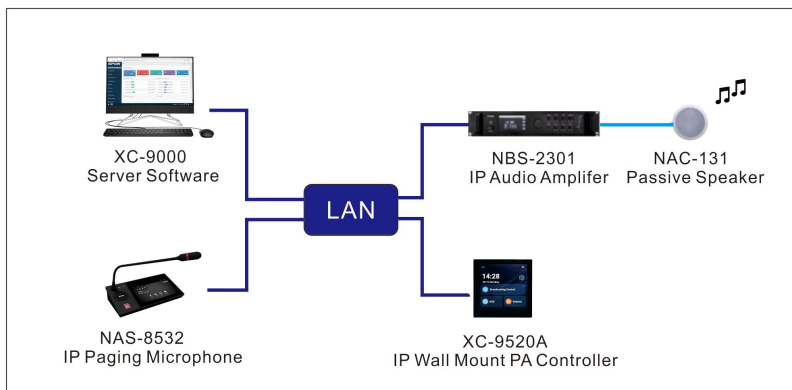

DIMENSION & INSTALLATION

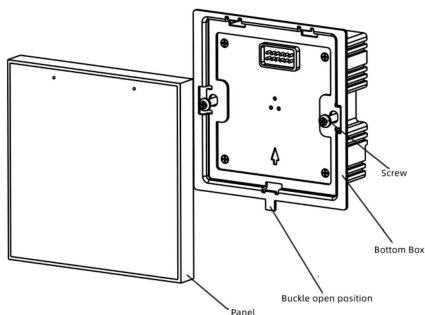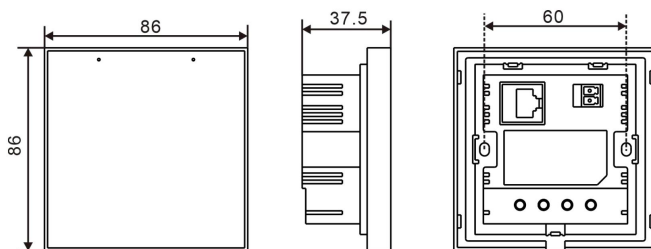

Installation instructions:

1. First, separate the panel and the base at the position where the buckle is opened;
2. Connect the cable to the base;
3. Install the base in the 86 cassette that has been pre-installed on the wall with two 86-box matching mounting screws. Note that the arrow points up.

