

NXT-2200


Multi-Channel Cloud-Based Rack Mount Paging Adaptor



SPON Cloud-Based Rack Mount Integrated Amplifier NXT-2204P1K embedded with SPON's proprietary intellectual property, Industrial-grade hardware for higher stability. With 1U compact size, built-in backup system for constant stability. 4*4 matrix channel design for precise control of the broadcasting area.

MAIN FUNCTIONS

1. Simple design to reduce non-specialized operations and lower maintenance issues.
2. Multiple mixing outputs, including 1 emergency microphone input and 4 front analog inputs. Each audio channel has independent volume control.
3. Supports offline operation and automatically switches to local playback when the network is interrupted. It can store multiple sets of schedules and run them automatically based on the date.
4. Configuration can be easily set and saved with a single click through an app, allowing for remote real-time operation. It supports remote updates for scheduled tasks and ringtone files.
5. Dual network port design, supporting data connection through a hand-in-hand approach.



SPECIFICATION

Power Parameters

Power Supply: AC 220V, 50Hz

Rated Current: 1A

Audio Parameters

S/N (Signal-to-Noise) Ratio: MIC: $\geq 85\text{dB}$; AUX: $\geq 95\text{dB}$

Audio Sampling & Bit Rate: 48kHz, 24Bit

THD (Total Harmonic Distortion): $\leq 0.5\%$ at 1kHz

Frequency Response: 40Hz~18kHz

Network Parameters

Network I/F: 10BASE-T/100BASE-TX RJ45

Network Protocol: HTTP, RTP, TCP/IP, UDP, ARP, ICMP, IGMP

Configuration Method: Web Interface or NXT-APP

Mechanical&Environment Properties

Mounting Method: Rack Mount

Installation Environment: Dry Indoor Locations

Operating Temperature: $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$

Operating Humidity: $\leq 90\%$ RH non-condensing

Housing Material: Surface-Treated Steel Plate

Color: Black

Product Dimensions: 483*334*44mm

Product Weight: 2.6Kg

Product Warranty: 2 Years

Accessories

1× Adapter (6.35 to 3.5)

1× RCA Audio Cable (1.5 meters)

2× Mounting Brackets

8× Countersunk Cross Screws (M4*6)


4× Foot Pads ($\Phi 123$ with 3M adhesive)

1× Power Cord (1 piece, 3*1.0mm²/1.5m)

4× Wire Terminals (3.81-4P)


1× Certificate of Compliance and Warranty Card

1× Quick Installation Guide




INTERFACE DESCRIPTION

[Front Panel]

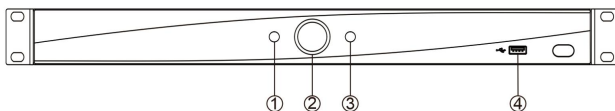


- ① Page Up Key
- ② Display
- ③ Page Down Key
- ④ USB Port



[Rear Panel]

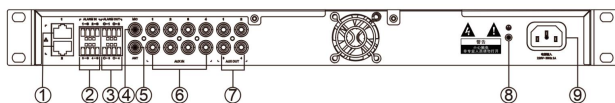

- ① Ethernet Port
- ② Alarm Input Port
- ③ Alarm Output Port
- ④ None Dynamic Microphone Input Interface
- ⑤ FM Antenna Interface
- ⑥ Line Input Interface
- ⑦ Line Output Interface
- ⑧ Ground Terminal
- ⑨ Ground Terminal




CONNECTION

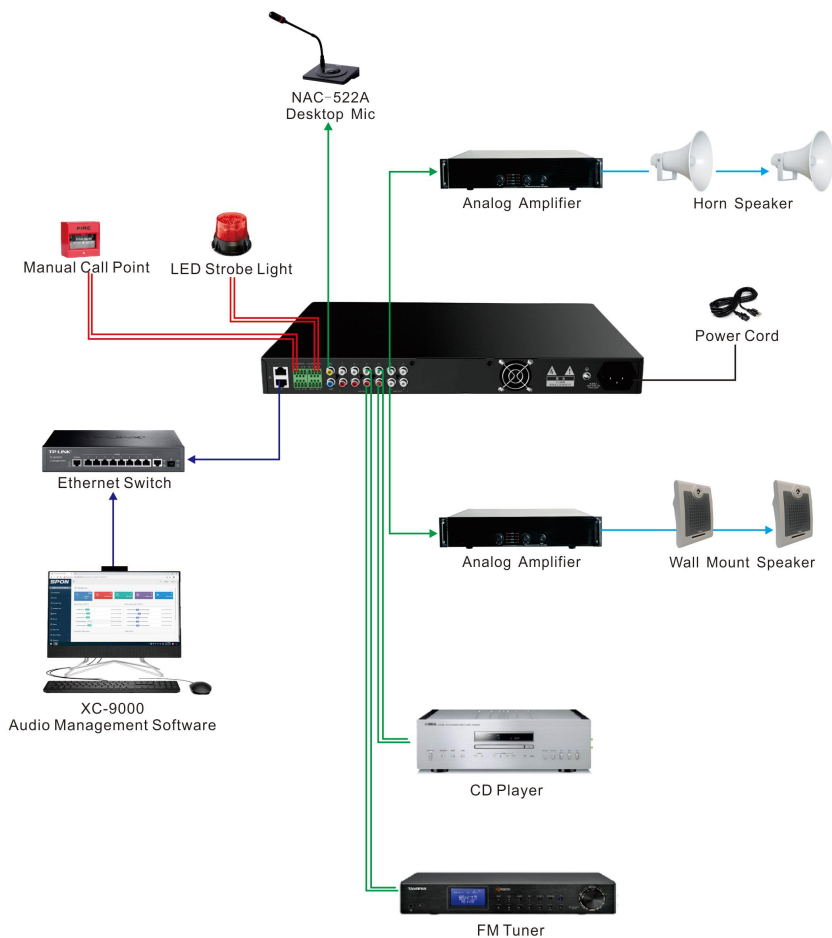

APPLICATION


Application 1

SPON NXT-2200 Cloud Based Rack Mount Paging Adaptor is suitable for chain stores, convenience stores, private residences and other scenes .It is plug and play device ,after it register to the cloud server ,user can use mobile to manage at everywhere in the world.

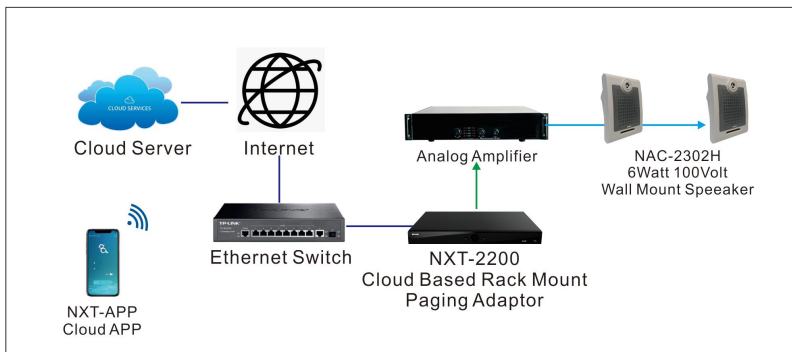

DIMENSION DRAWING


[Rack Mount]

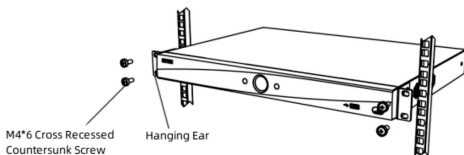

Note: Please prepare the rack mounting screws separately.

[Desktop Mount]

The materials used from the accessory kit:
 $\Phi 12 \times 3$ (foot pads) X4

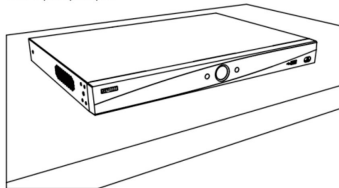

SPON

SPON Communications Co.,Ltd
 Address: SPON Industrial Park, Changsha, Hunan, China
 Tel: 86-0731-88570190
 Fax: 86-731-889-15786
 Mail: sales@spn.com.cn
 www.sponcomm.com

