



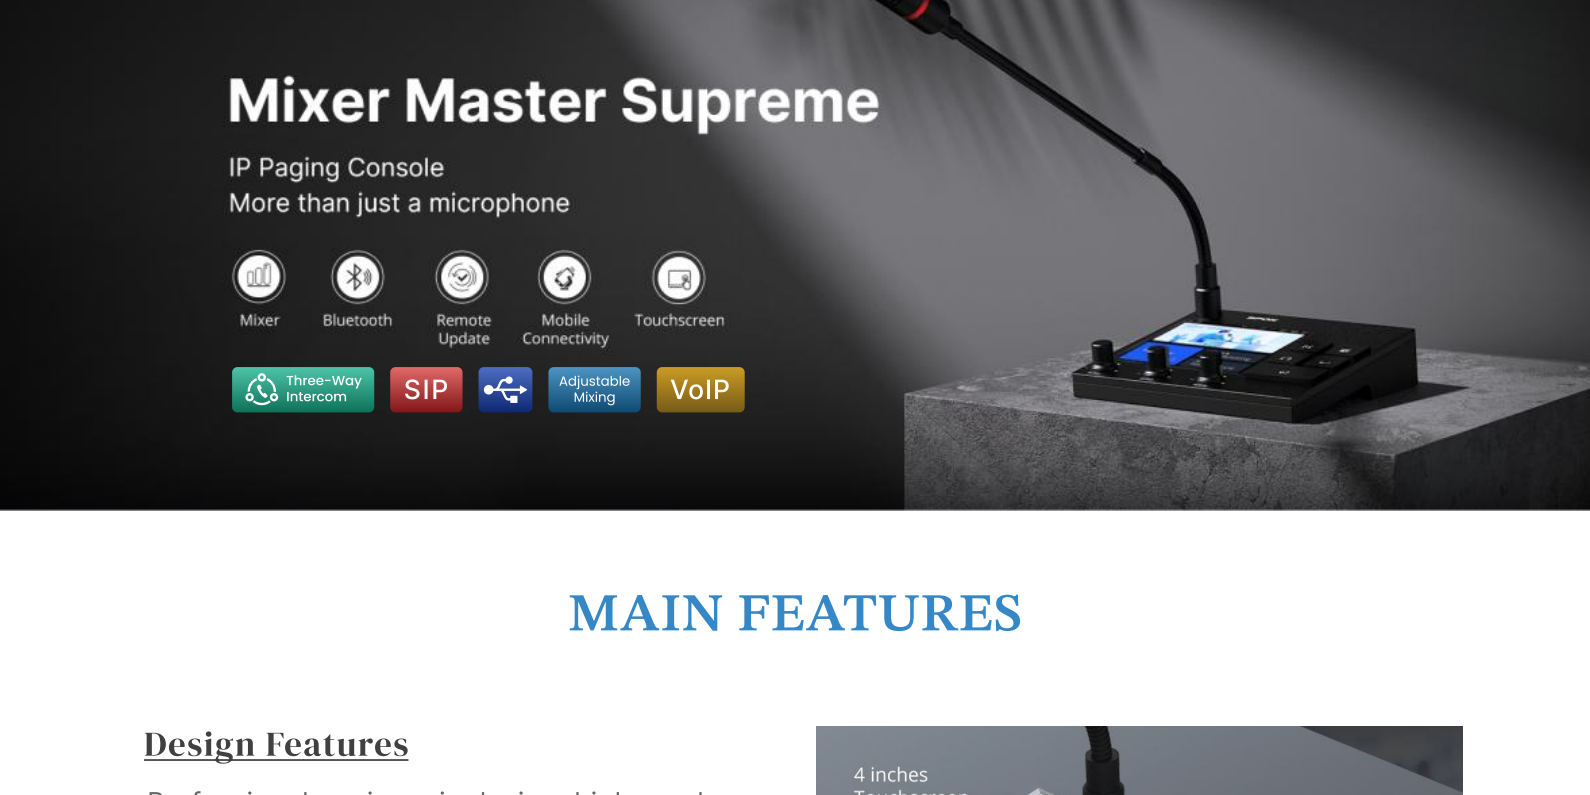

## MAIN FEATURES


### Design Features

- Professional paging mic design, high-grade aluminum alloy shell, sturdy and durable.
- High-definition 4" digital true color capacitive touch screen (resolution ratio: 480×480).
- Controllable via "Easy Mic" mobile app for the configurations of paging zones and scheduled bell ringing tasks.
- Support making live paging announcement to all zones, designated zone or designated IP endpoint.

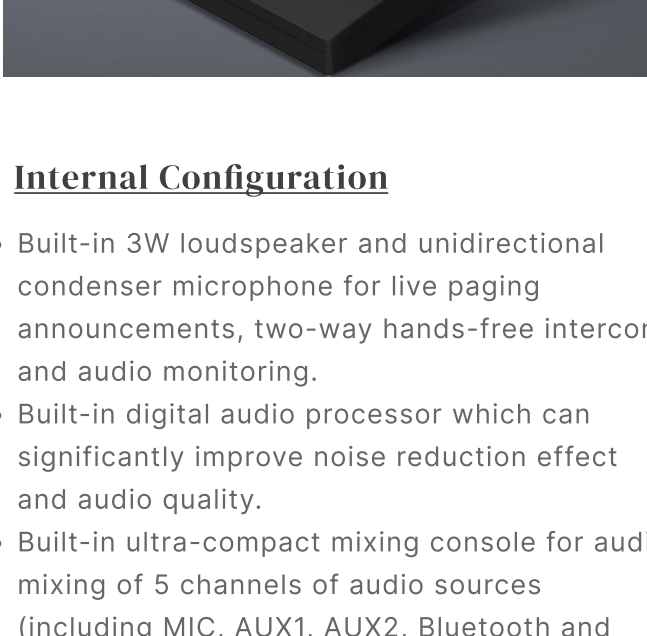

### Internal Configuration

- Built-in 3W loudspeaker and unidirectional condenser microphone for live paging announcements, two-way hands-free intercom and audio monitoring.
- Built-in digital audio processor which can significantly improve noise reduction effect and audio quality.
- Built-in ultra-compact mixing console for audio mixing of 5 channels of audio sources (including MIC, AUX1, AUX2, Bluetooth and USB flash drive).
- Built-in web server for the management of maximum 30 IP endpoint devices.

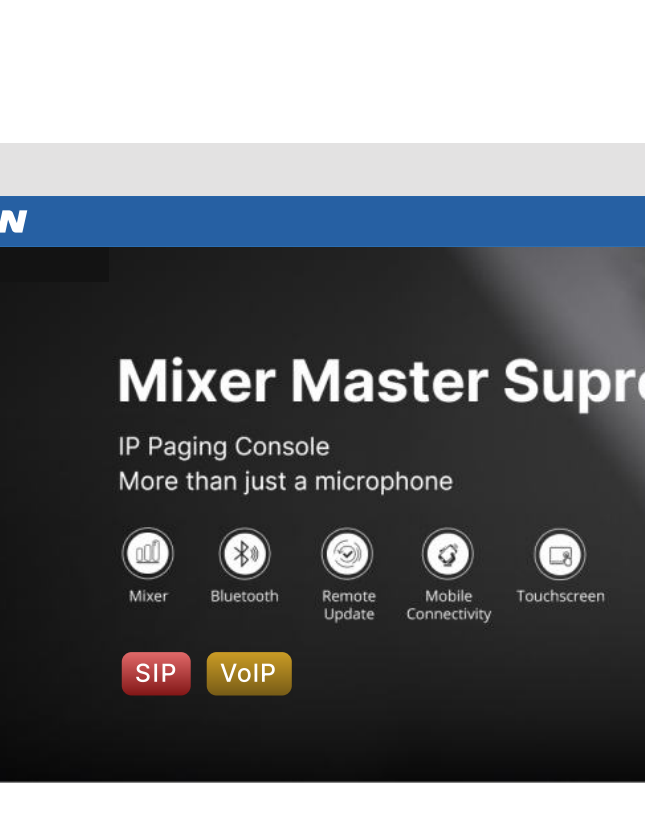


01




## MAIN FEATURES

### Performance Features

- Support easy configuration and online firmware upgrade via user-friendly web page.
- Compatible with standard SIP protocol, can be registered on VoIP phone system (mainstream brand such as Cisco, Asterisk, Yealink, etc.) independently.
- Equipped with relay input (2-pin terminal block), which can be connected to external detection device (such as manual call point, heat/smoke/infrared detector, etc.) for triggering event-triggered emergency notification task automatically.
- Standard RJ45 Ethernet port, accessible to the system wherever Ethernet is available, supporting cross-segment and cross-router.

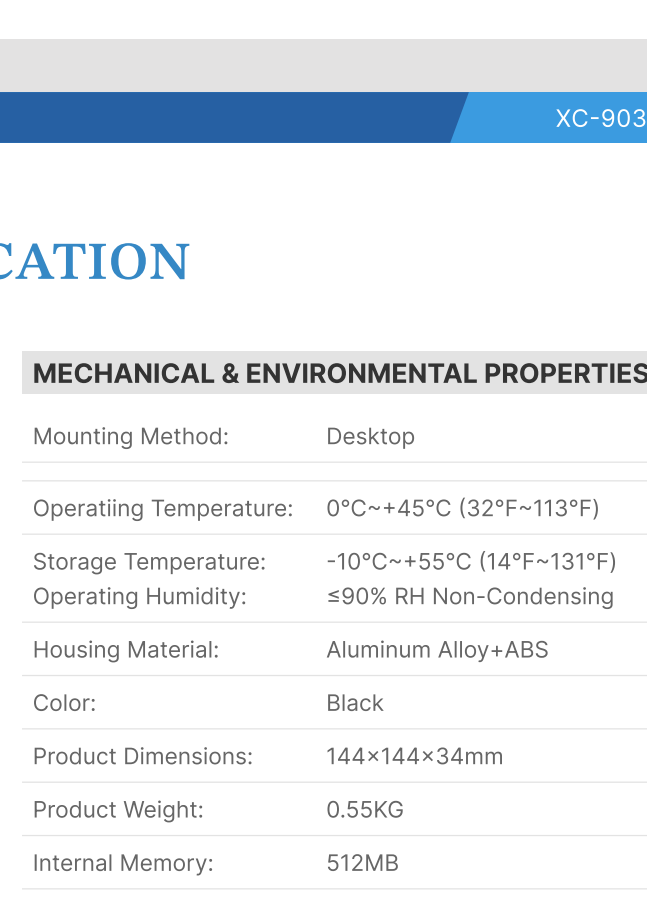

02

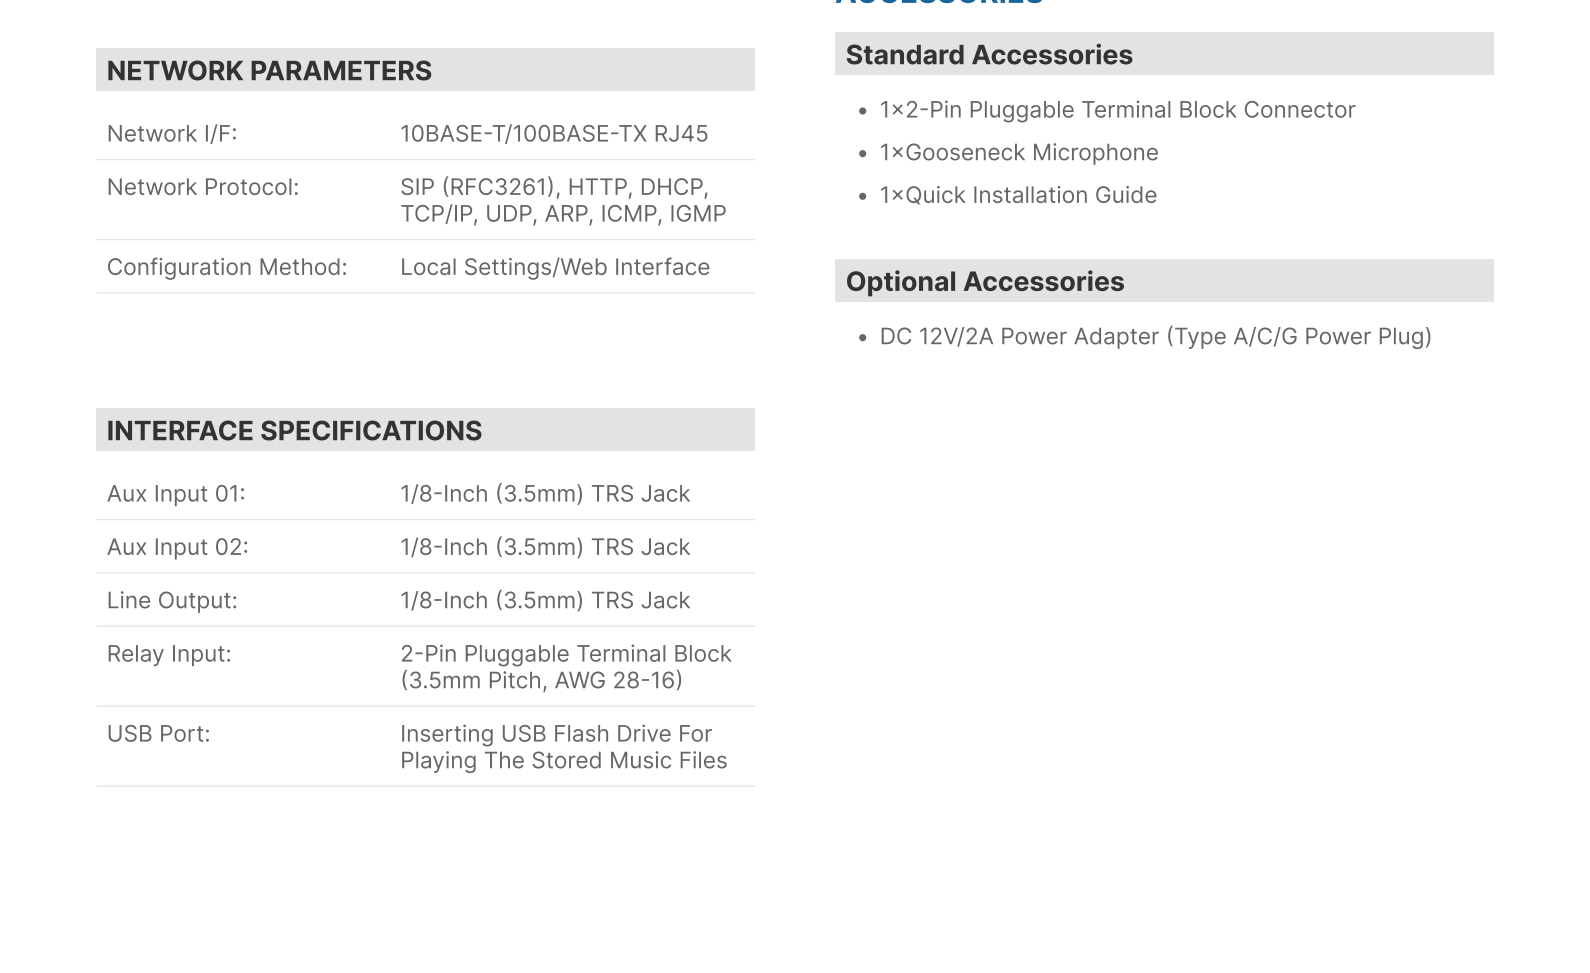

## SPECIFICATION

### POWER PARAMETERS

|                            |             |
|----------------------------|-------------|
| Power Supply:              | DC 12V/1.5A |
| Standby Power Consumption: | ≤3W         |

### AUDIO PARAMETERS

|                              |                                          |
|------------------------------|------------------------------------------|
| Audio Codec:                 | G.711 A-Law, G.711 M-Law, G.729, PCM/L16 |
| S/N (Signal-To-Noise) Ratio: | ≥80dB                                    |
| Audio Sampling & Bit Rate:   | 8kHz~44.1kHz, 16bit, 8kbps~320kbps       |
| Frequency Response:          | 100Hz~16kHz                              |

### NETWORK PARAMETERS

|                       |                                                         |
|-----------------------|---------------------------------------------------------|
| Network I/F:          | 10BASE-T/100BASE-TX RJ45                                |
| Network Protocol:     | SIP (RFC3261), HTTP, DHCP, TCP/IP, UDP, ARP, ICMP, IGMP |
| Configuration Method: | Local Settings/Web Interface                            |

### INTERFACE SPECIFICATIONS

|               |                                                              |
|---------------|--------------------------------------------------------------|
| Aux Input 01: | 1/8-Inch (3.5mm) TRS Jack                                    |
| Aux Input 02: | 1/8-Inch (3.5mm) TRS Jack                                    |
| Line Output:  | 1/8-Inch (3.5mm) TRS Jack                                    |
| Relay Input:  | 2-Pin Pluggable Terminal Block (3.5mm Pitch, AWG 28-16)      |
| USB Port:     | Inserting USB Flash Drive For Playing The Stored Music Files |

### MECHANICAL & ENVIRONMENTAL PROPERTIES

|                        |                          |
|------------------------|--------------------------|
| Mounting Method:       | Desktop                  |
| Operating Temperature: | 0°C~+45°C (32°F~113°F)   |
| Storage Temperature:   | -10°C~+55°C (14°F~131°F) |
| Operating Humidity:    | ≤90% RH Non-Condensing   |
| Housing Material:      | Aluminum Alloy+ABS       |
| Color:                 | Black                    |
| Product Dimensions:    | 144×144×34mm             |
| Product Weight:        | 0.55KG                   |
| Internal Memory:       | 512MB                    |
| Product Warranty:      | 2 Years Limited          |

### ACCESSORIES


#### Standard Accessories

- 1×2-Pin Pluggable Terminal Block Connector
- 1×Gooseneck Microphone
- 1×Quick Installation Guide


#### Optional Accessories

- DC 12V/2A Power Adapter (Type A/C/G Power Plug)


03

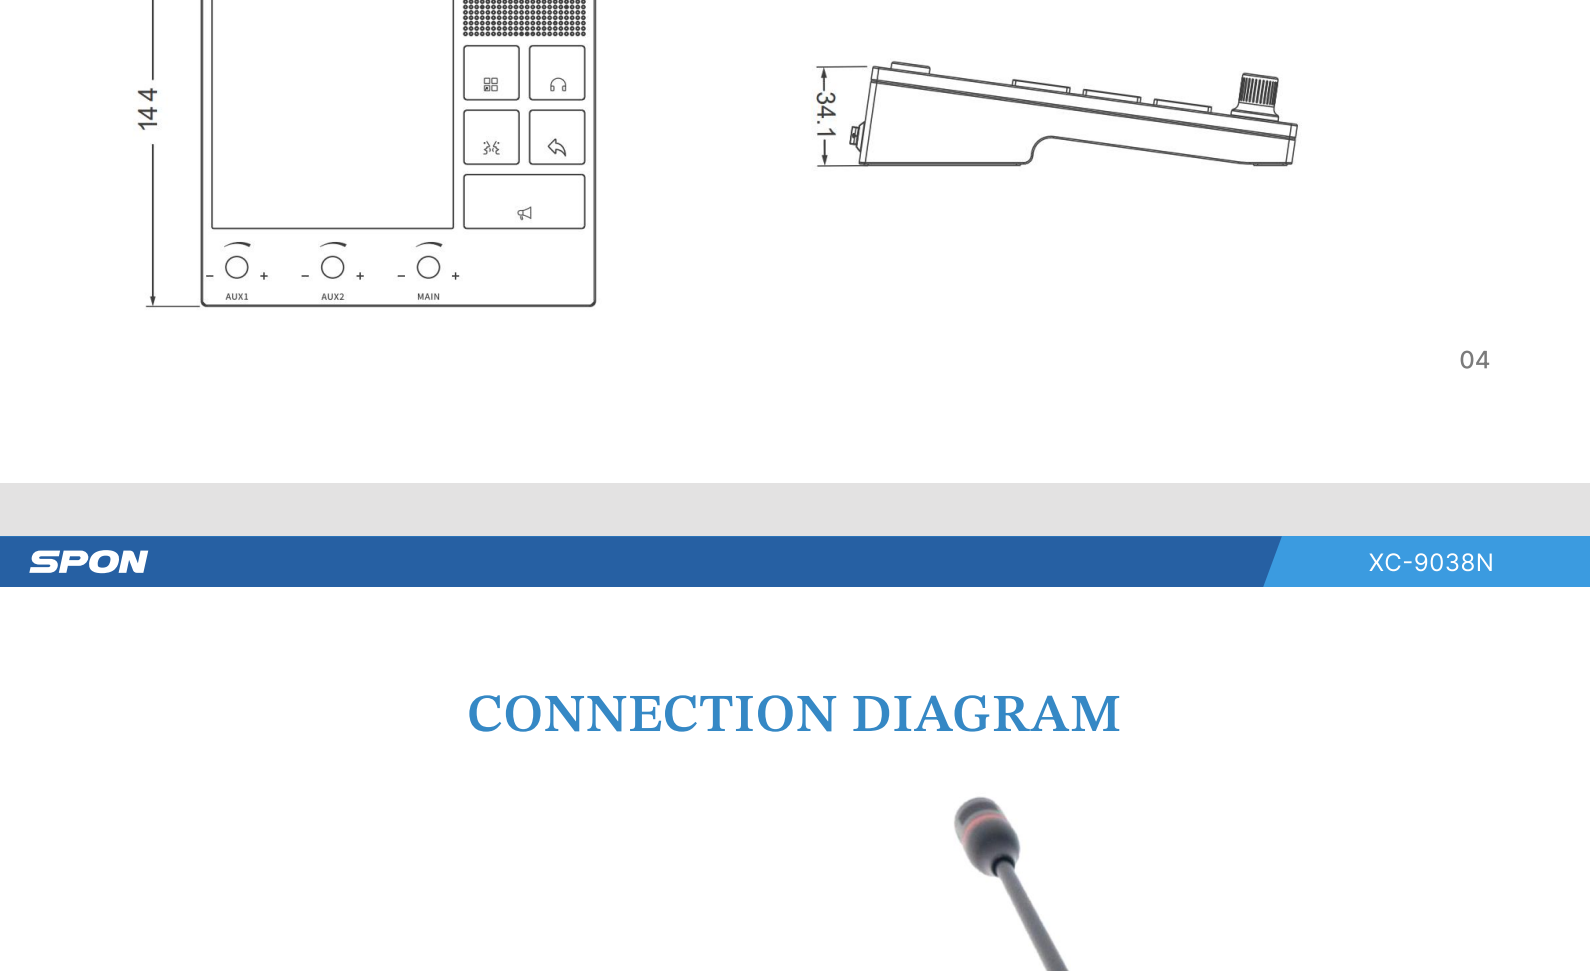


04

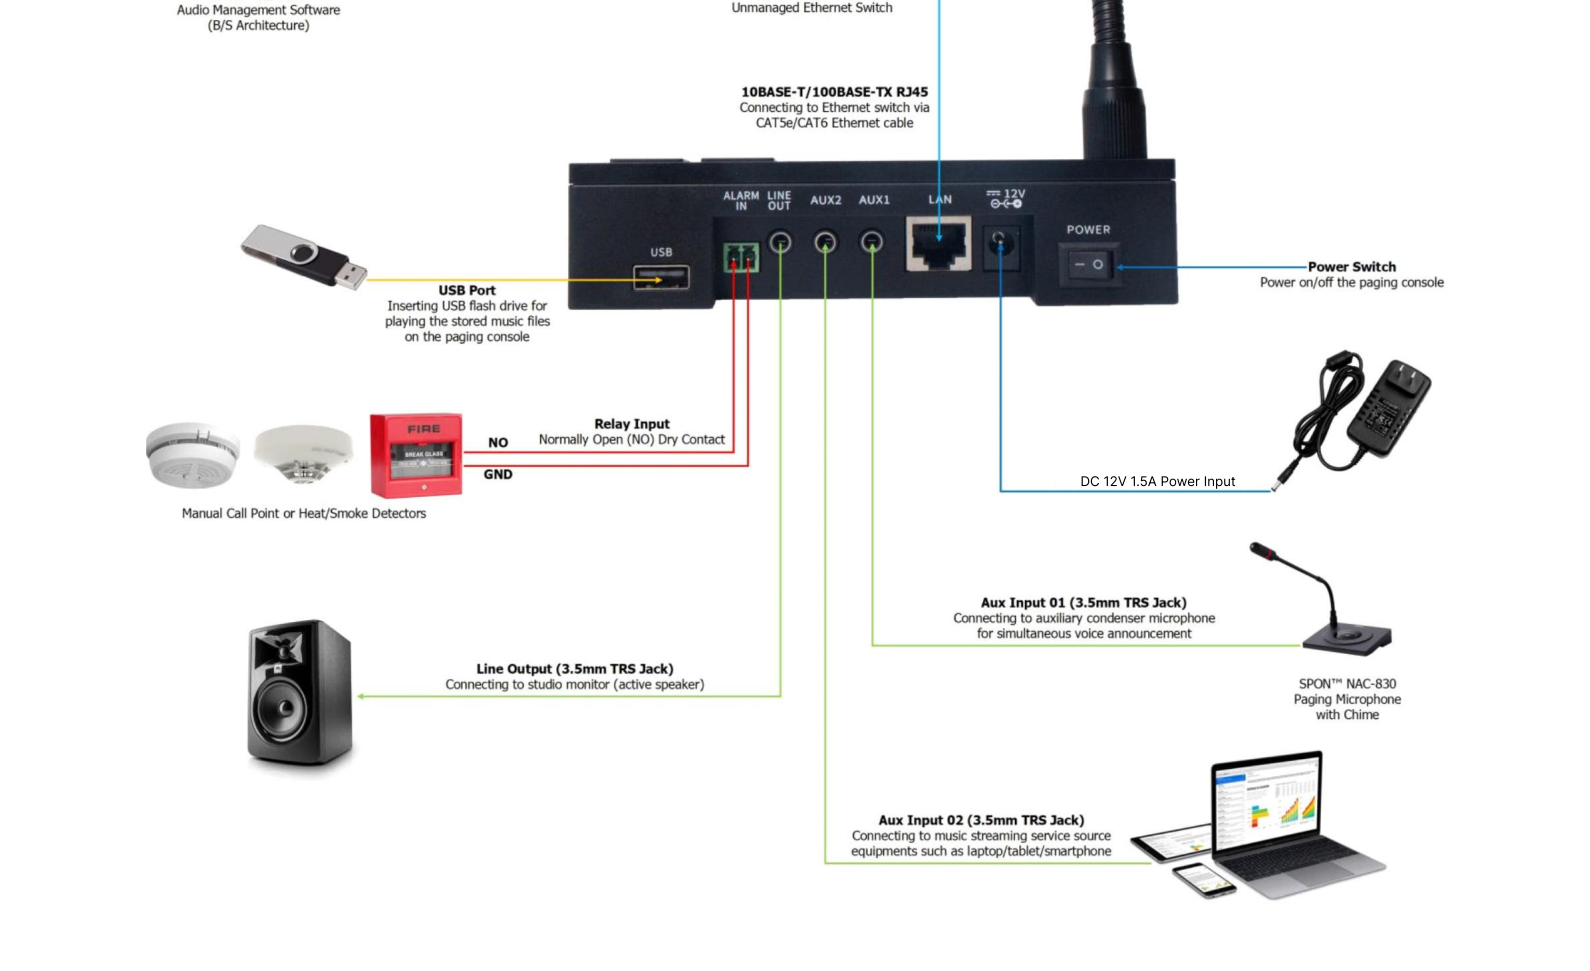

05

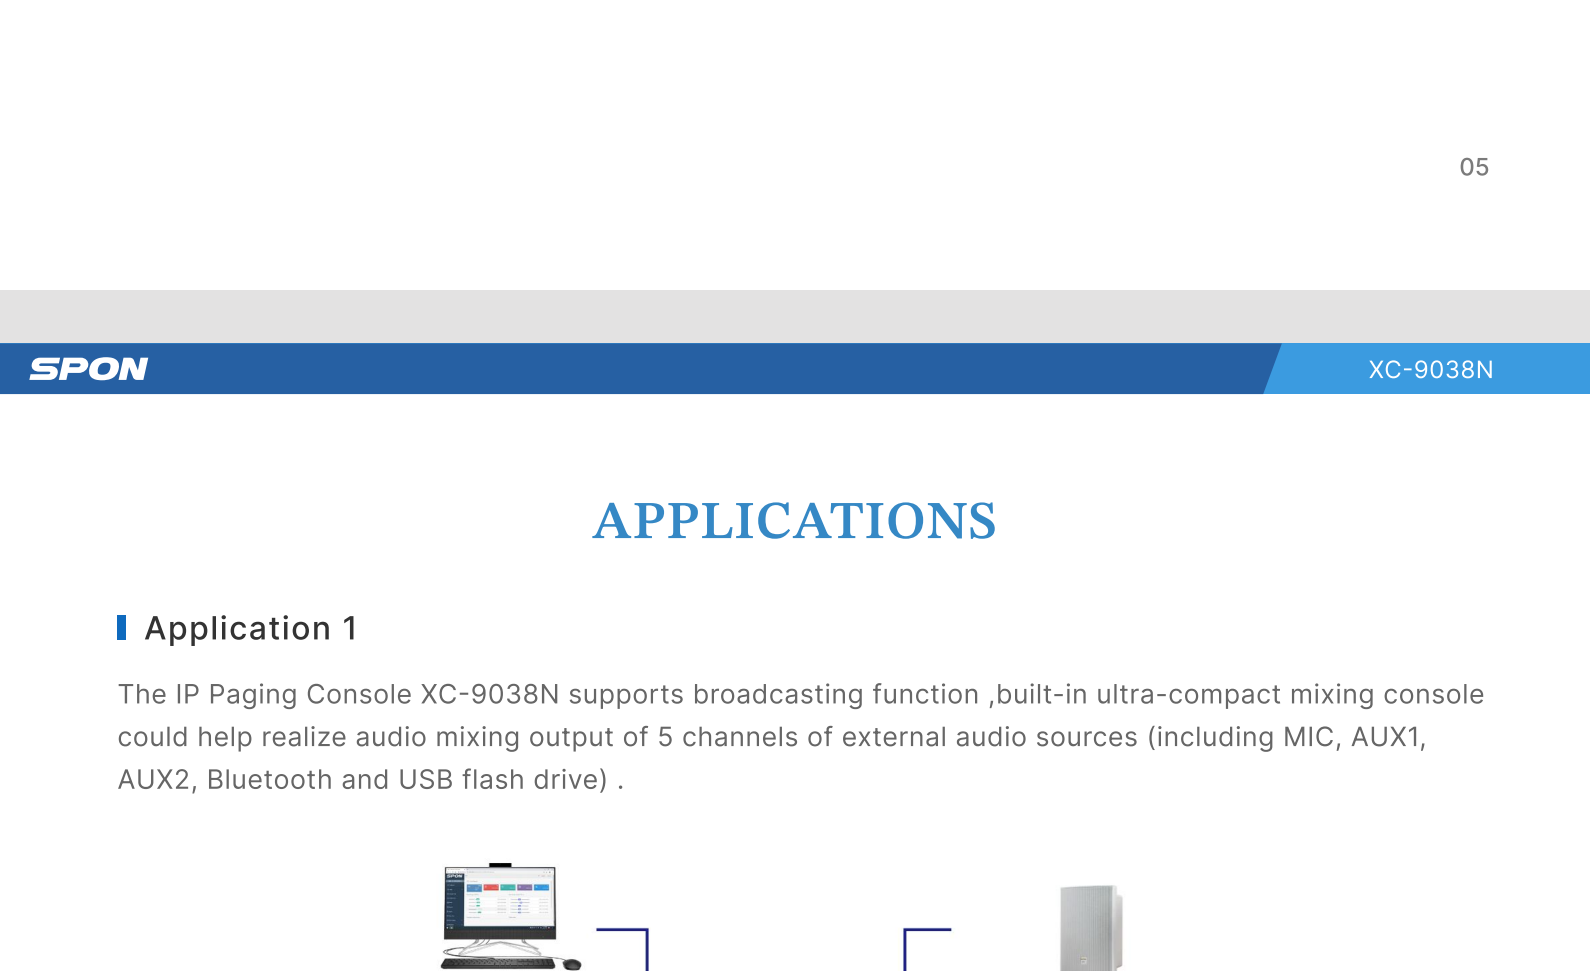


06

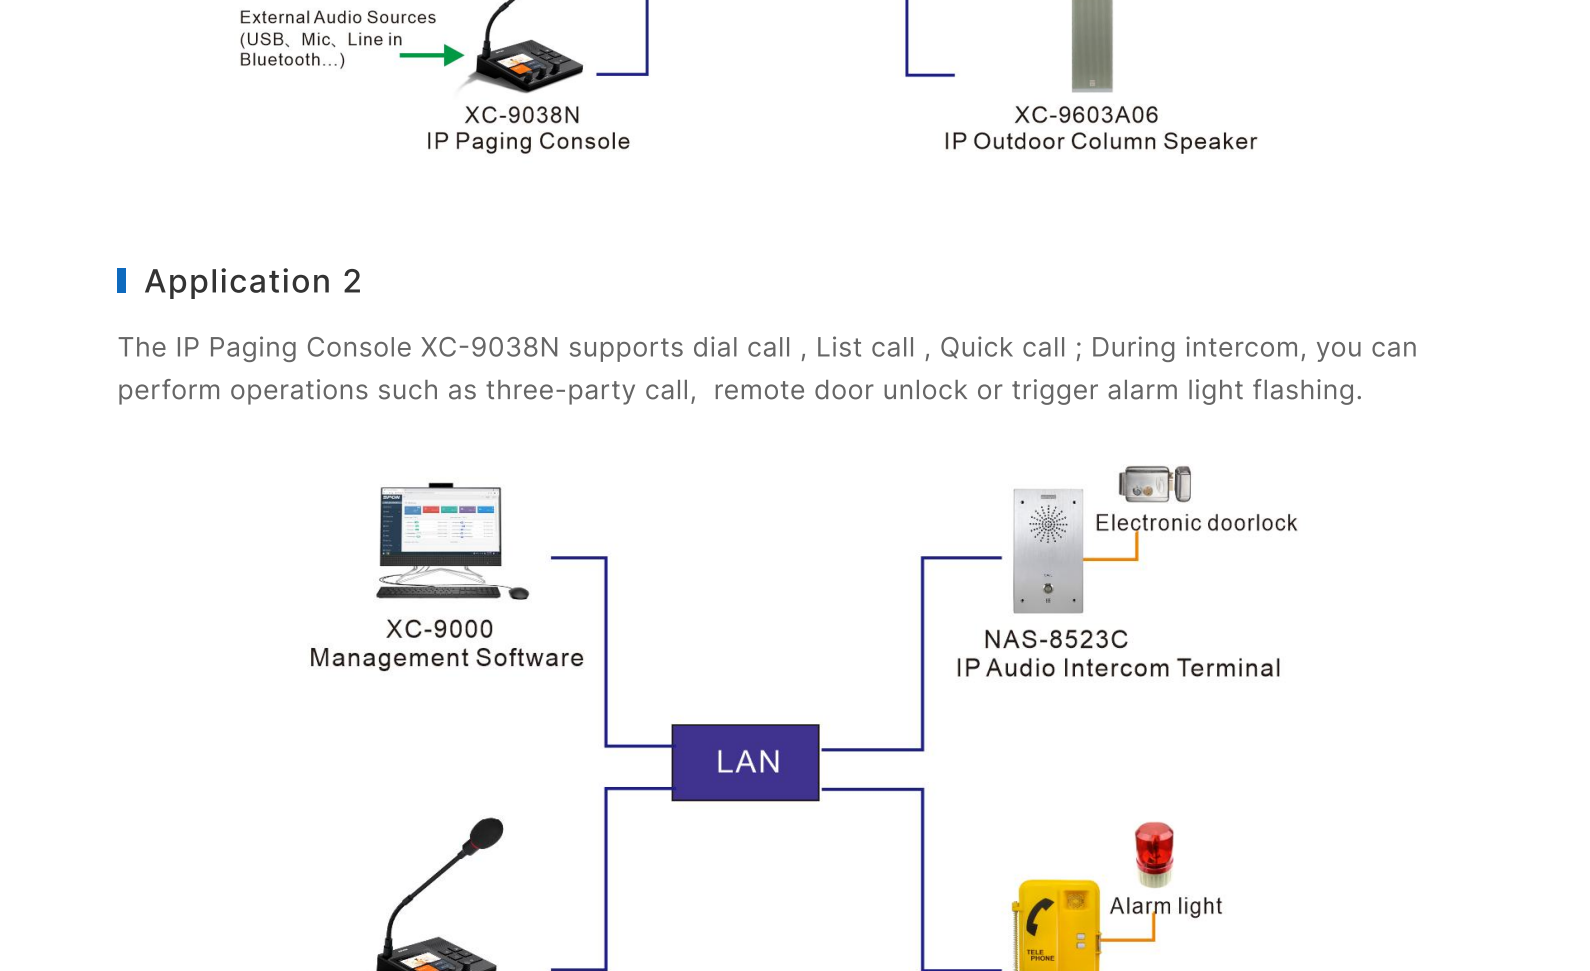


07




## CASES

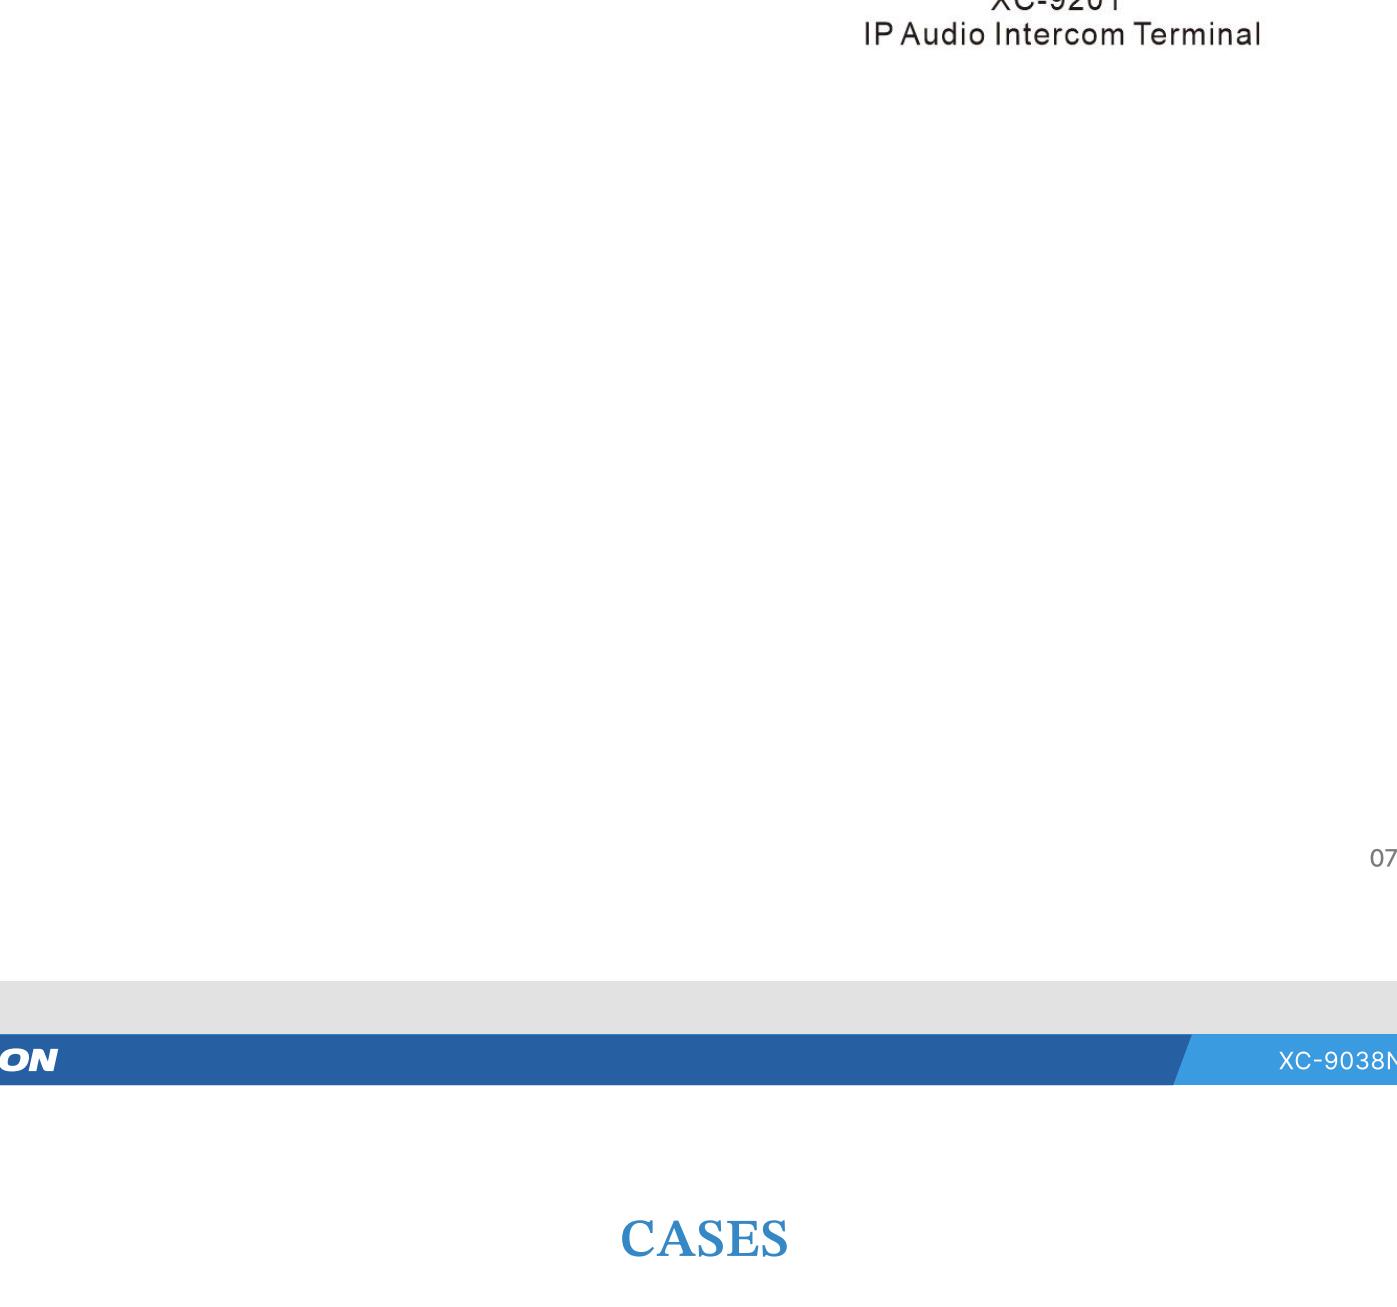

07

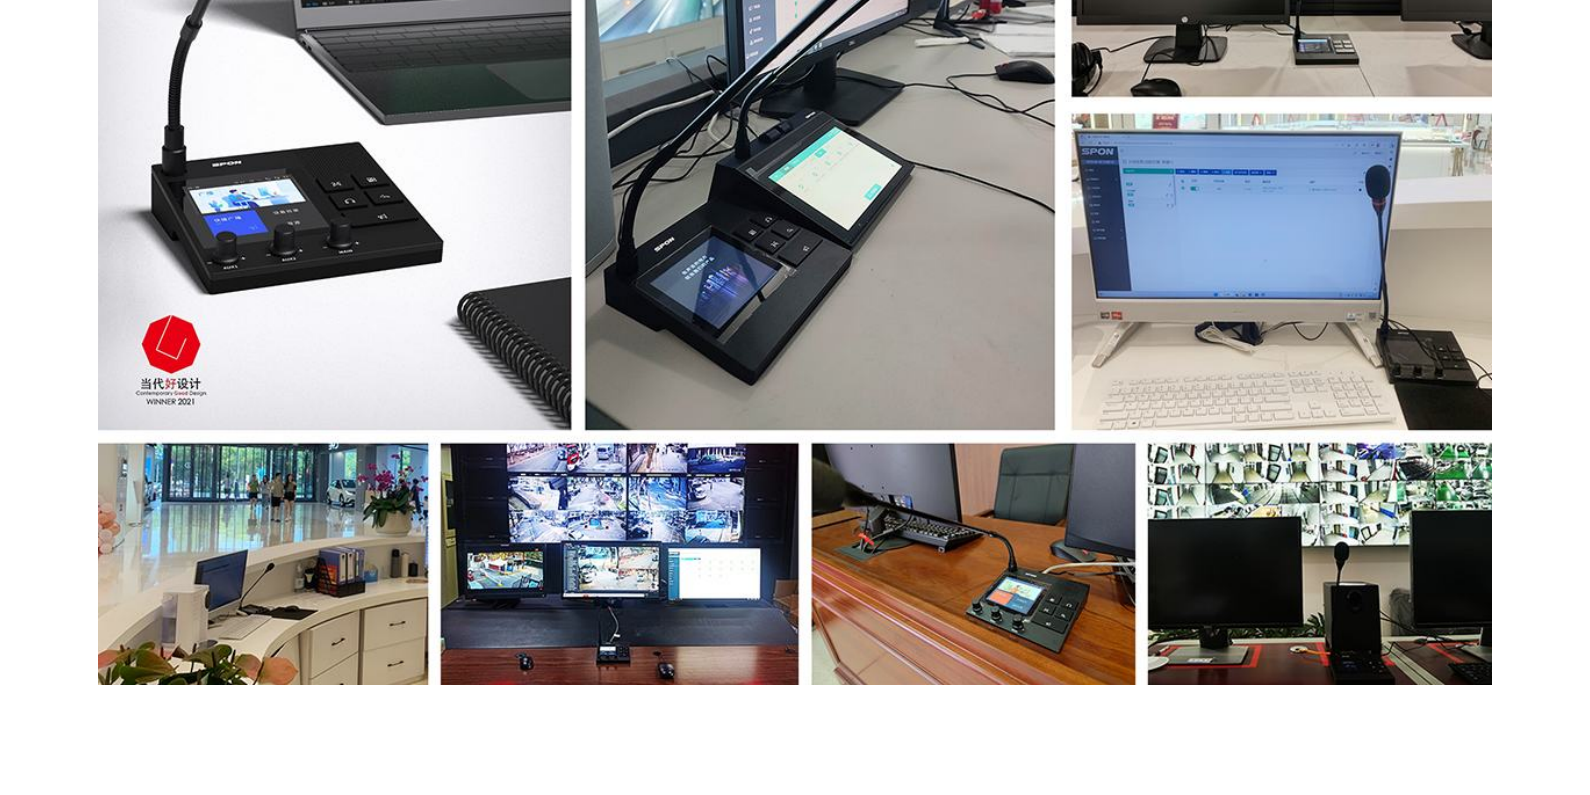

## CASES

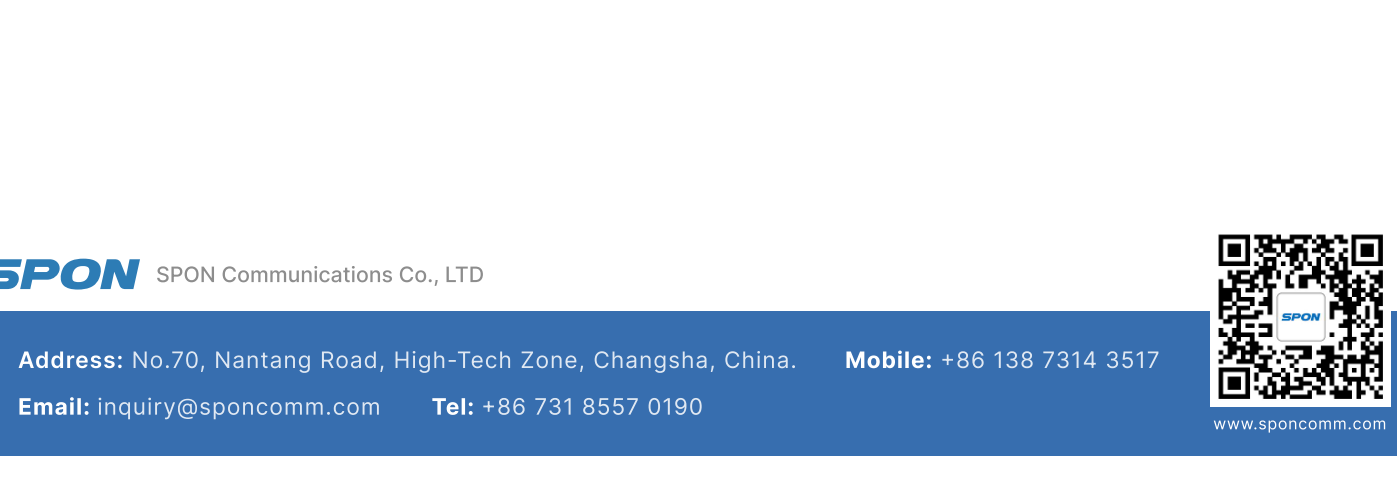

## CASES



## CASES

