



LCS-5251C-L/D-L

Chairman Unit & Delegate Unit

- Video Tracking
- 4.3" Touchscreen
- High-Fidelity Microphone
- Digital and Analog Backup
- Representatives Management

4.3-Inch
Touch Screen

Voting/
Attendance

48V
Backup

10ms
Latency

MAIN FEATURES

▲ Design & Audio Quality

- **Flexible Gooseneck Design:** Adjustable in 360 degrees, the microphone offers a versatile and customizable positioning for optimal use.

▲ technical advantage

- **Full Digital Signal Transmission:** Utilizes full digital signal transmission with robust anti-interference capabilities.

- **Self-check Indicator Light:** Equipped with a self-check indicator light, providing feedback on the current loop status.

▲ Chairman Unit Features

- **Priority Speaking Rights:** The chairman unit has priority speaking rights and can mute other delegate units at any time.

- **Consent Button:** The chairman unit is equipped with a "consent button," allowing approval of speaking requests from delegate units while in the request-to-speak mode.

SPECIFICATION

POWER PARAMETERS

Power Supply:	Host centralized power supply 24V input
Power Consumption:	≤3.5W

POWER PARAMETERS

Audio Codec:	MP3/PCM/ADPCM
Audio Sampling Rate ,Bit Rate:	8Khz-48Khz,16bit,8Kbps-320k bps
SNR:	≥83dB
Frequency Response:	40Hz-18KHz

INTERFACE

RJ45 Port *2

ACCESSORIES

1×Network Cable(1M)

1×Quick Installation Guide


1×Quality Certificate

1×Warranty card


MECHANICAL & ENVIRONMENTAL PROPERTIES

Mounting Method:	Desktop
Installation Environment:	Dry Indoor Locations
Display:	4.3 inch capacitive touch screen
Product Color:	Black
Microphone Head:	14mm diameter gold-plated capacitor head
Directional:	Ultra-Cardioid
Shell Material:	ABS/ Aluminum Alloy
Working Temperature:	0°C~+45°C
Working Humidity:	≤90%, No Condensation
Product Dimensions (mm):	114*100*355mm
Warranty:	2 Years

INTERFACE DESCRIPTION

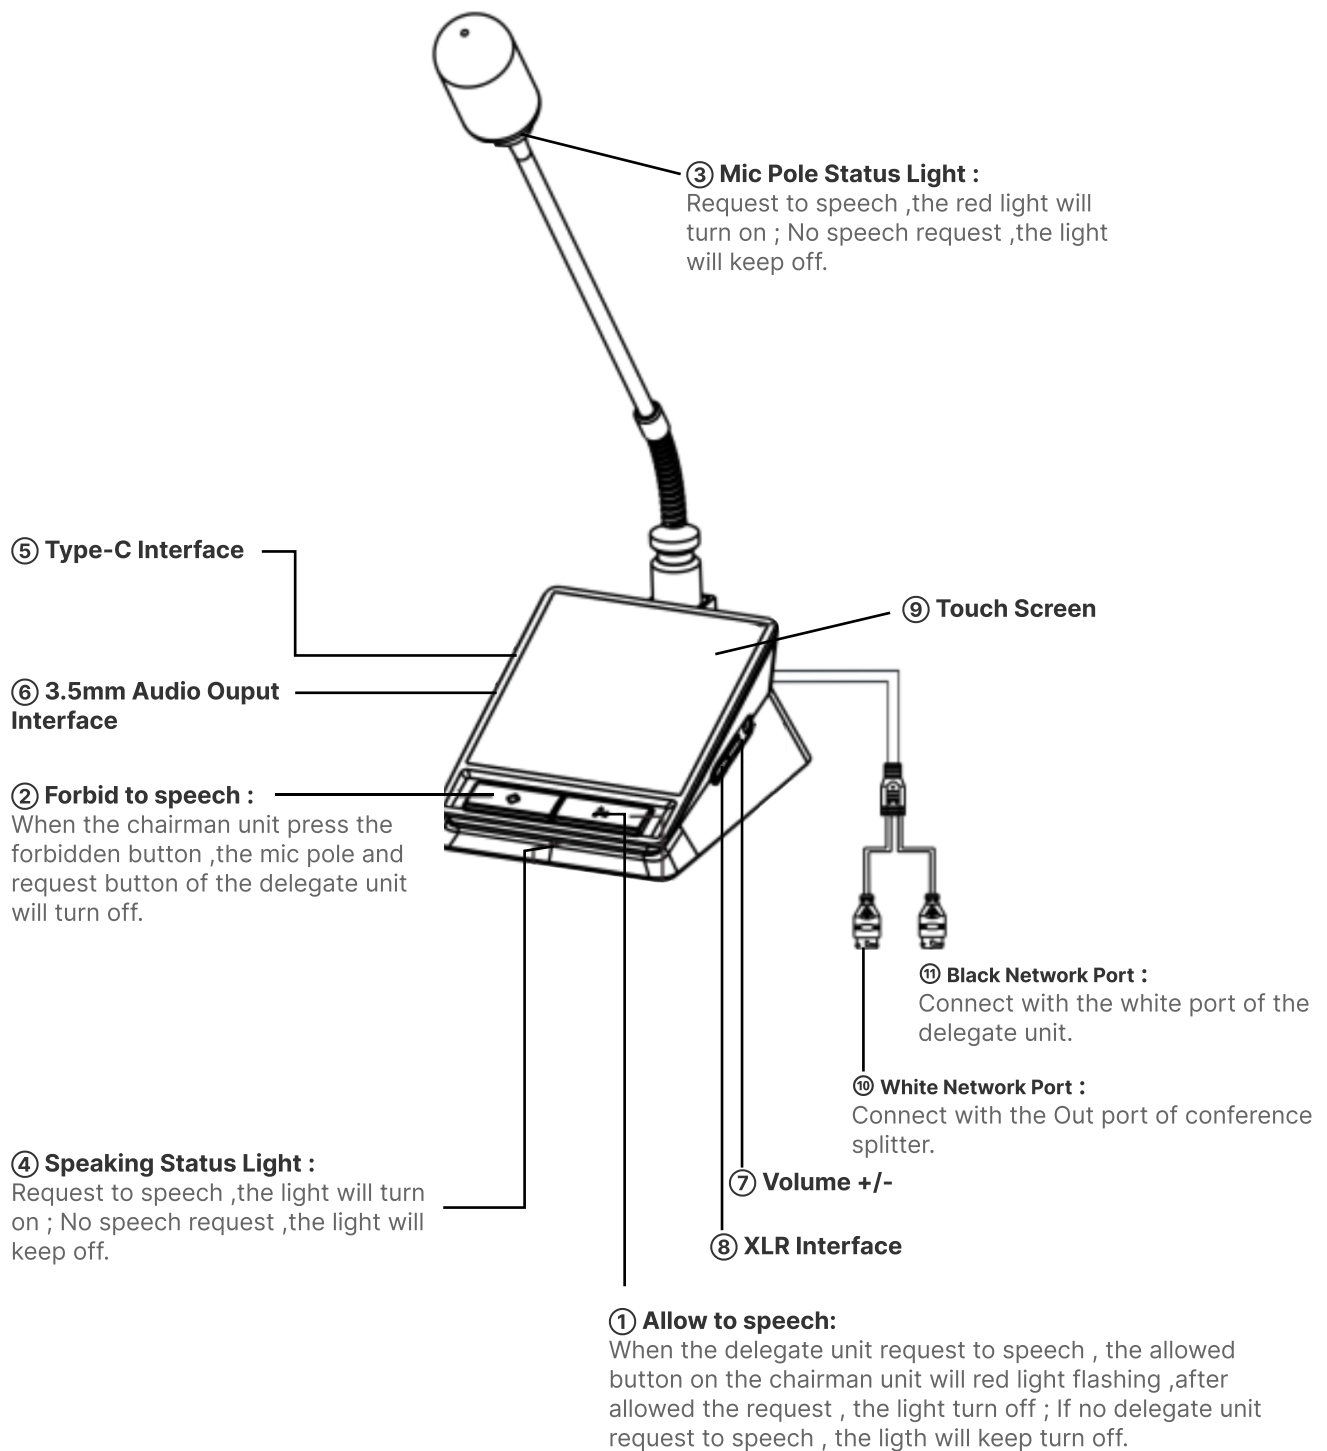

INTERFACE DESCRIPTION

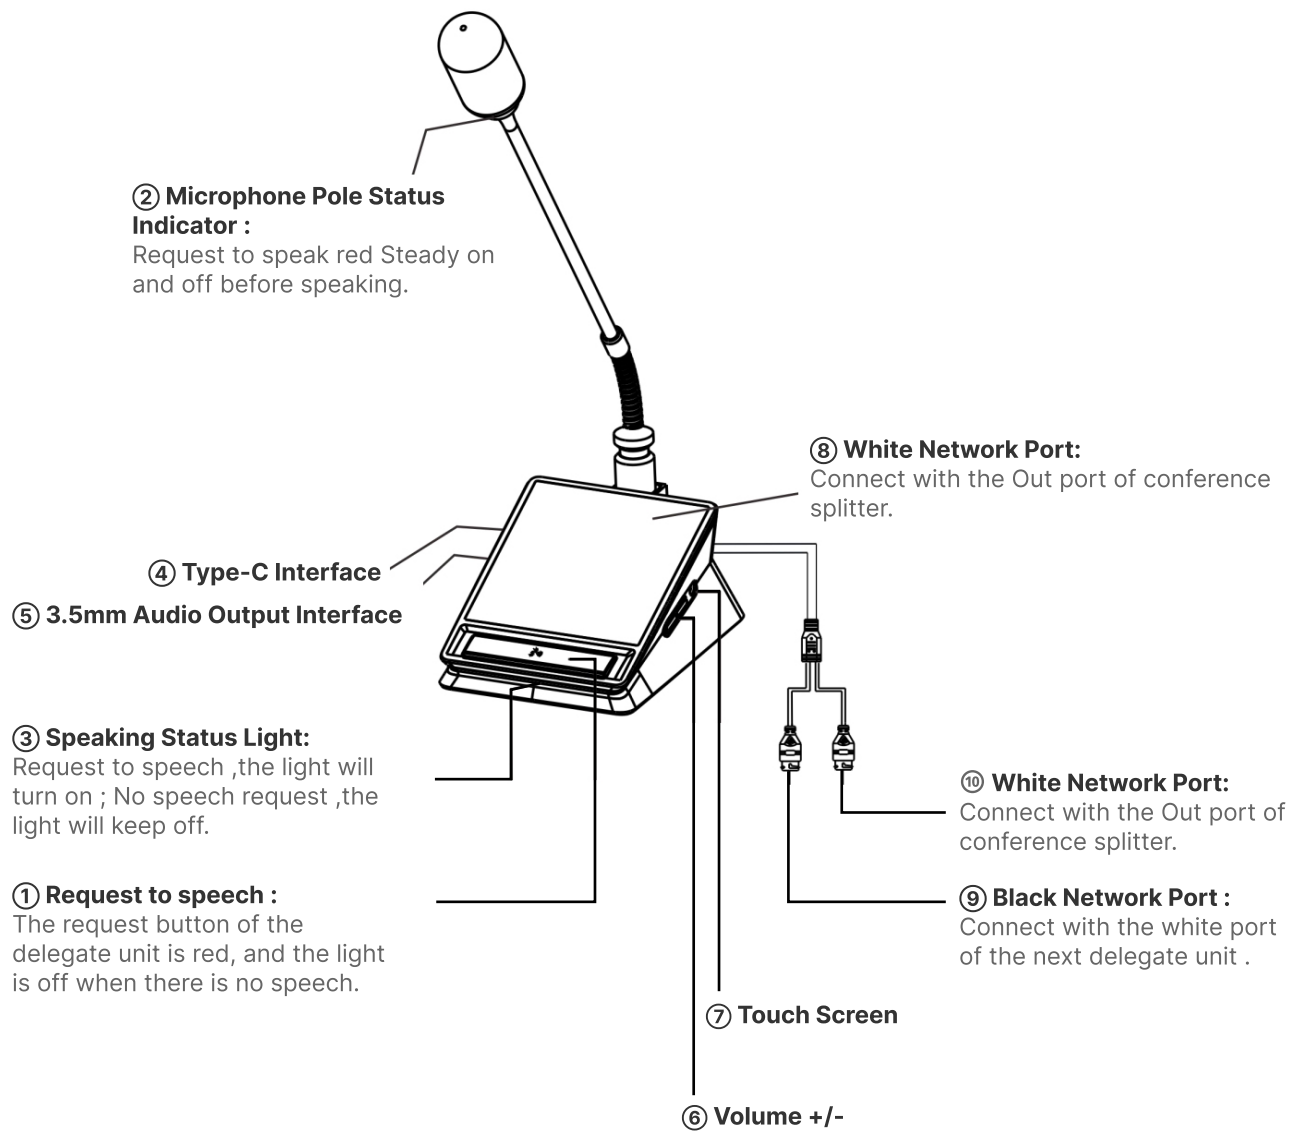

CONNECTION DIAGRAM

