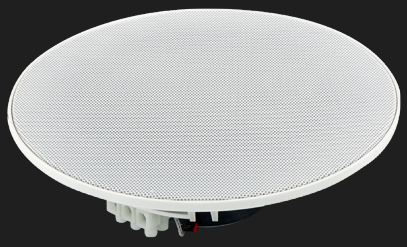

NAC-132

Ceiling speaker

- Extraordinary speech and music reproduction effects
- High strength ABS material
- Perfectly integrated into all indoor Spaces
- Ceiling recessed for quick and easy installation
- Meet CE standard

Clear Sound Quality | Metal Mesh Cover | 100V Fixed Voltage | Wide Frequency Response

MAIN FEATURES

The NAC-132 is a stylish, minimalist ceiling speaker made of durable, corrosion-resistant, and high-temperature-resistant ABS material. Its alloy net cover prevents dust ingress, preserving sound quality and extending speaker life. Featuring a high-quality audio transformer, it minimizes signal loss, ensuring splendid sound quality with smoother high frequencies. Ideal for airports, lobbies, shopping malls, classrooms, meeting rooms, restaurants, and offices, it's designed for various indoor settings.

SPECIFICATION

Input Power:	3W/6W(100V)
Rated Impedance:	3.3kΩ(3W)/1.7kΩ(6W)
SPL:	88±3dB(1M/1W)
Frequency Response:	85Hz-15KHz
Speaker Unit:	5"*1
Mounting Hole Size:	Φ140mm
Speaker Mounting Method:	Ceiling Recessed
Connection Type:	Plastic Terminal
Material:	Front shell: ABS
Size:	Φ160mm x 54mm
Weight:	0.5Kg
Operating Temperature:	-25°C to 55°C
Storage Temperature:	-40°C to 70°C
Relative Humidity:	≤95%

DIMENSIONAL DRAWING

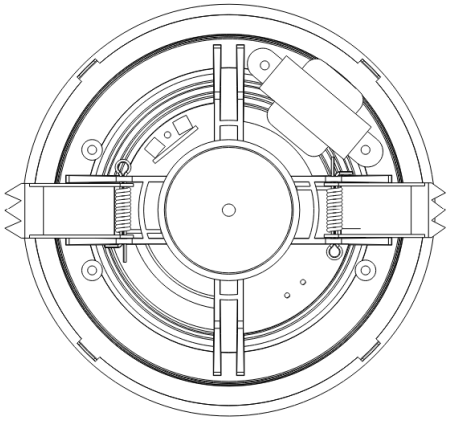

Size (unit: mm)

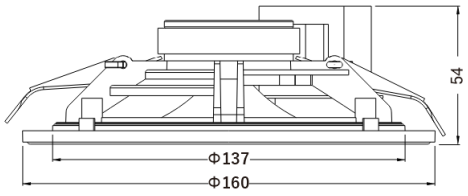

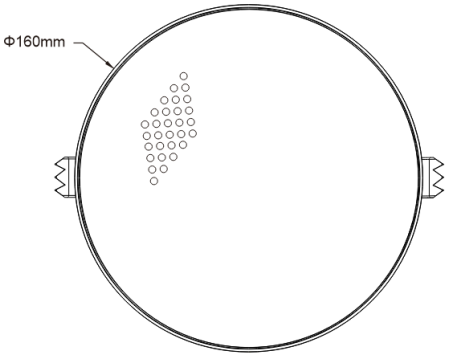

CIRCUIT DIAGRAM

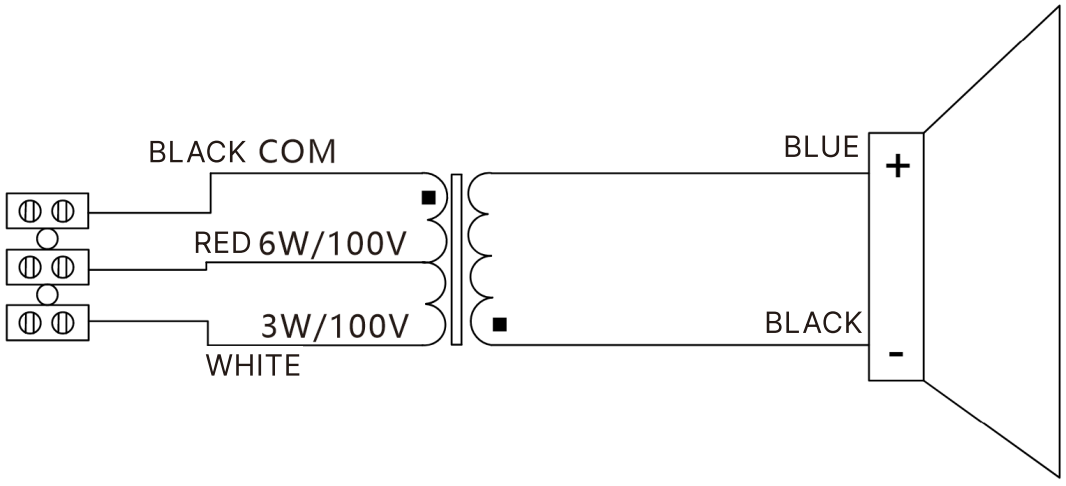

[Frequency Response Diagram]

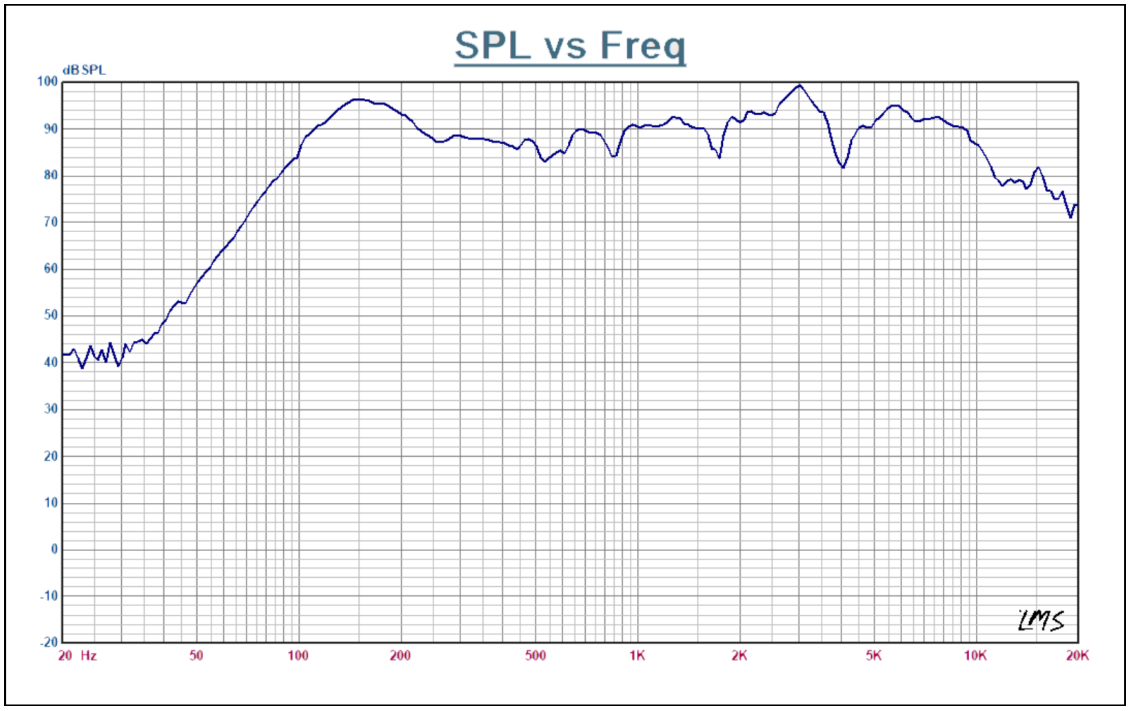

[Impedance Diagram]

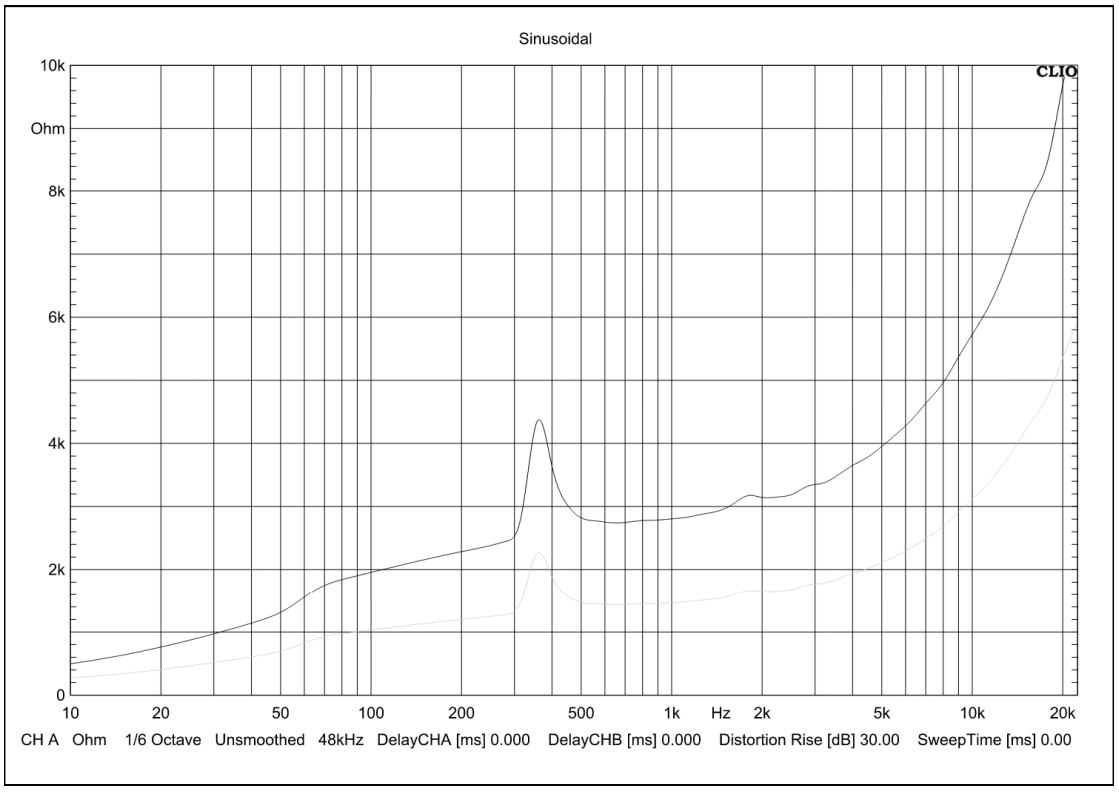

INSTALLATION INSTRUCTIONS

STEP 1

Create a ϕ140 mm mounting hole on the installation plane.

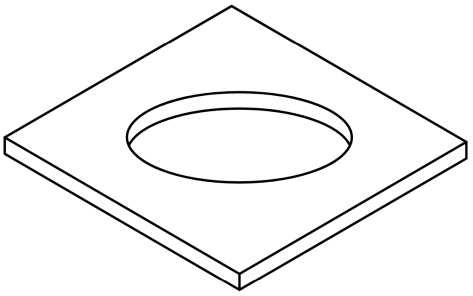

STEP 2

Connect the audio cable and pull the clip so that it passes through the mounting plane.

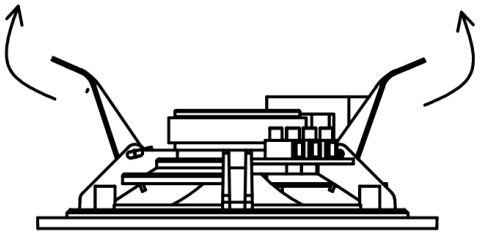

STEP 3

The product is clamped to the mounting surface.

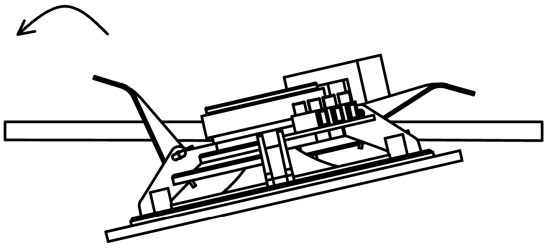

STEP 4

complete the installation.

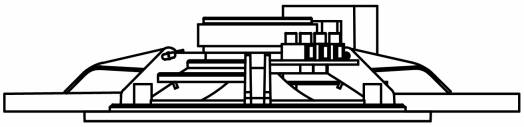

SPON SPON Communications Co., LTD

Address: No.70, Nantang Road, High-Tech Zone, Changsha, China. **Mobile:** +86 138 7314 3517

Email: inquiry@sponcomm.com **Tel:** +86 731 8557 0190

www.sponcomm.com