



NAC-134

Ceiling speaker

- Extraordinary speech and music reproduction effects
- High strength ABS material
- Perfectly integrated into all indoor Spaces
- Ceiling recessed for quick and easy installation
- Meet CE standard

 Clear Sound Quality

 Metal Mesh Cover

 100V Fixed Voltage

 Wide Frequency Response


MAIN FEATURES

The NAC-134 is a stylish, minimalist ceiling speaker made of durable, corrosion-resistant, and high-temperature-resistant ABS material. Its alloy net cover prevents dust ingress, preserving sound quality and extending speaker life. Featuring a high-quality audio transformer, it minimizes signal loss, ensuring splendid sound quality with smoother high frequencies. Ideal for airports, lobbies, shopping malls, classrooms, meeting rooms, restaurants, and offices, it's designed for various indoor settings.



SPECIFICATION

Input Power:	5W/10W(100V)
Rated Impedance:	2k Ω (5W)/1k Ω (10W)
SPL:	94 $\pm$ 3dB(1M/1W)
Frequency Response:	65Hz-17KHz
Speaker Unit:	8"*1
Mounting Hole Size:	Φ 210mm
Speaker Mounting Method:	Ceiling Recessed
Connection Type:	Plastic Terminal
Material:	Front shell: ABS
Size:	Φ 232mm x 90mm
Weight:	0.94Kg
Operating Temperature:	-25°C to 55°C
Storage Temperature:	-40°C to 70°C
Relative Humidity:	$\leq$ 95%


DIMENSIONAL DRAWING

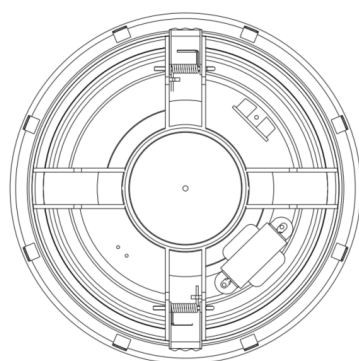


Size (unit: mm)

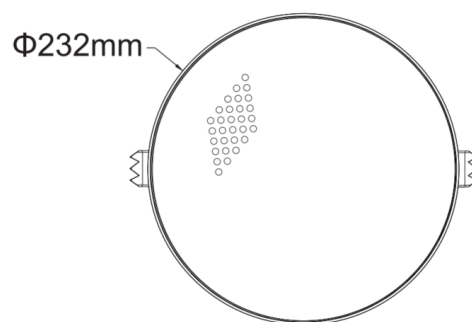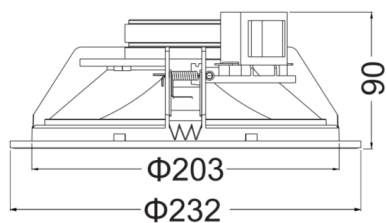


CIRCUIT DIAGRAM

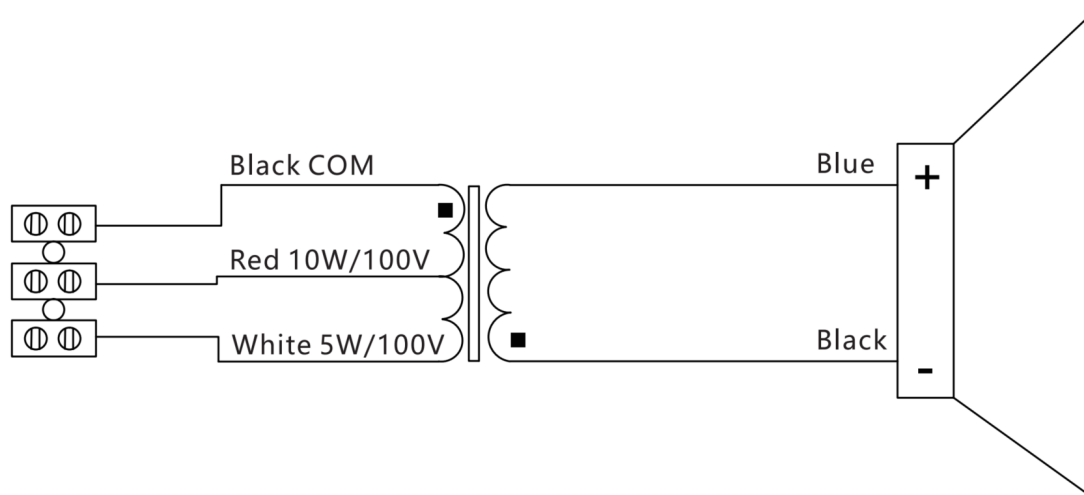

[Frequency Response Diagram]

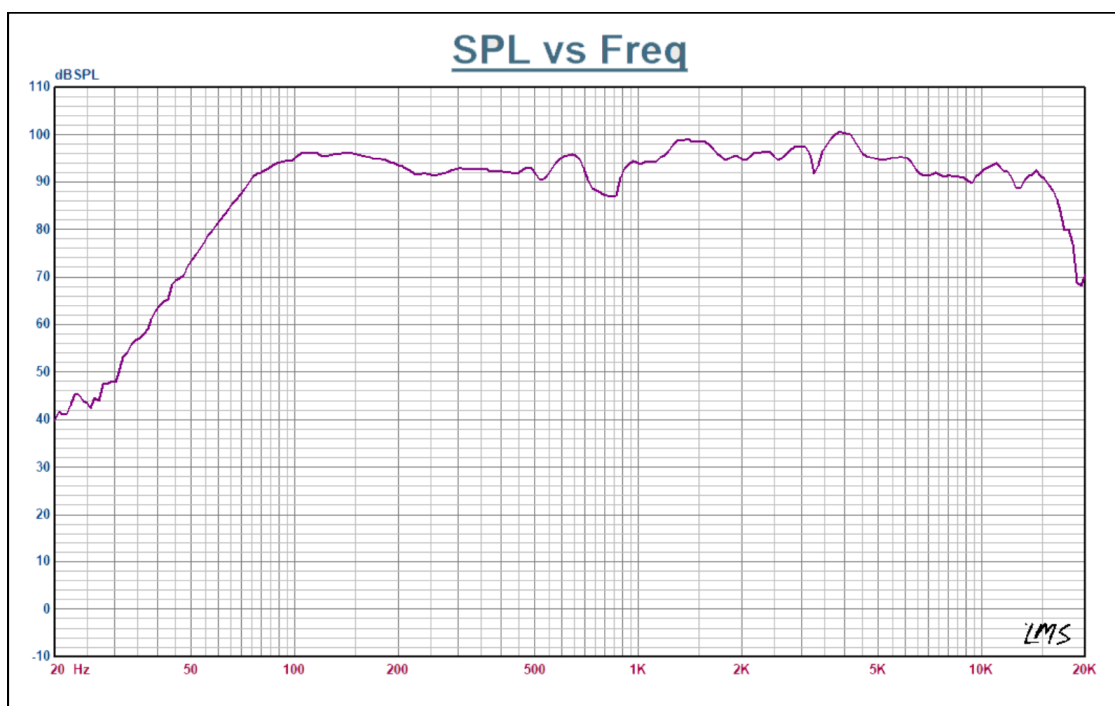


[Impedance Diagram]

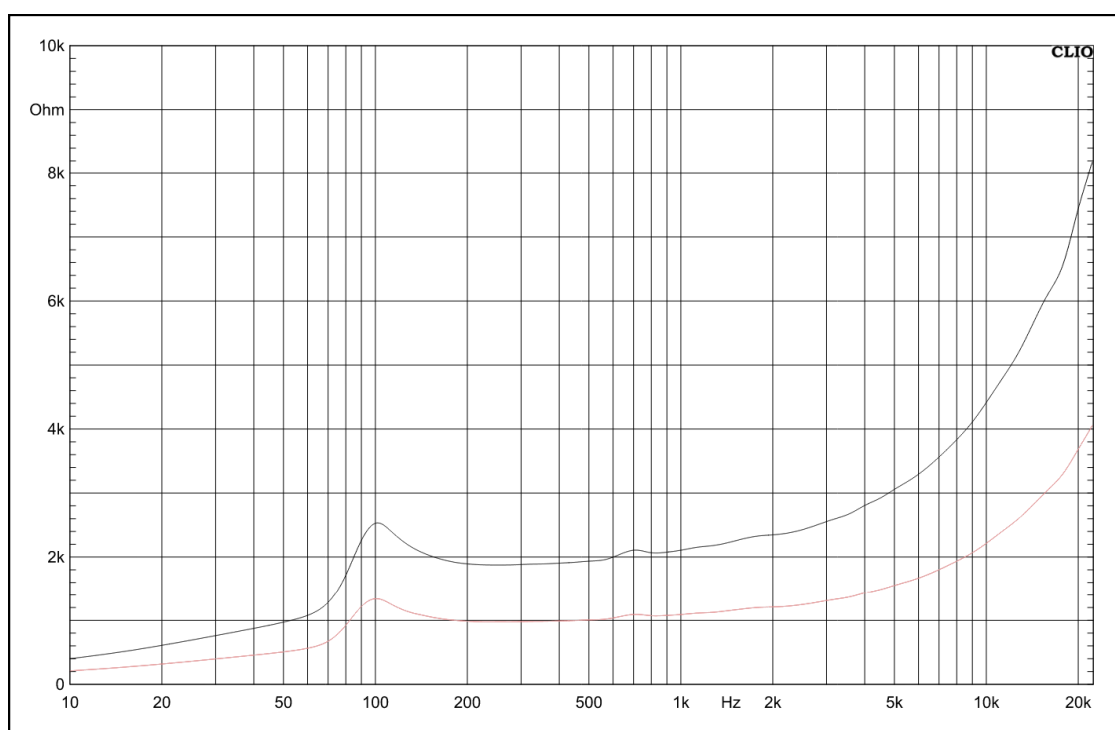


INSTALLATION INSTRUCTIONS

STEP 1


Create a $\phi 210$ mm mounting hole on the installation plane.

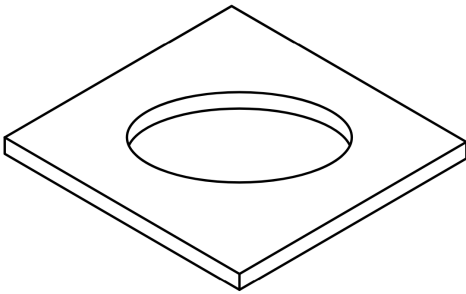**STEP 2**

Connect the audio cable and pull the clip so that it passes through the mounting plane.

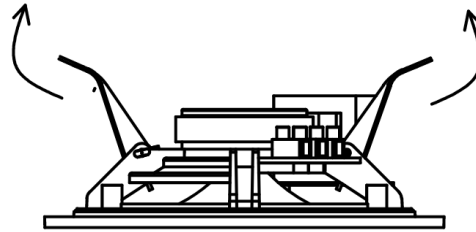**STEP 3**

The product is clamped to the mounting surface.

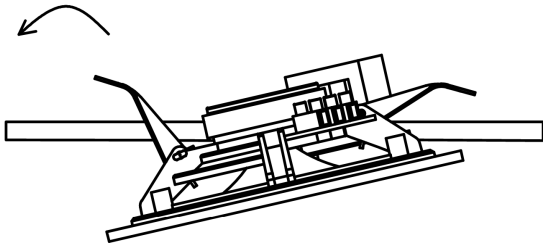**STEP 4**

complete the installation.

